

Datasheet


Description

Welded elbows, DIN2605/EN10253-2-A
3D-45°, ST 37.0W, certificate 3.1

Main data

Type 3/LR, 45°, 355.60 x 5.60

D	355.60 mm
S	5.60 mm
r	533.00 mm

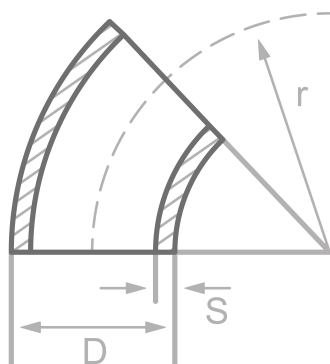

Chemical analysis (heat) in % of mass

(one content=max. value)

Short name: ST 37.0W

Mat. grade: 1.0254

C	Si	Mn	P	S	Cr	Cu	Mo	Nb	Ni	Ti	V	Others
0.16	0.35	1.20	0.025	0.020	0.30	0.30	0.08	0.01	0.30	0.04	0.02	

Mechanical properties

Short name: ST 37.0W

Mat. grade: 1.0254

Upper yield strength reH or Rp0.2 min for wallthicknesses T in mm, N/mm2 at room temperature		Tensile strength Rm for wallthickn. T in mm, N/mm2 at room temperature		Elongation A at room- temperature, min.%		Min. impact energy KV in J	
T ≤ 16	16 < T ≤ 60	T ≤ 16	16 < T ≤ 60	Longit.	Transv.	Longit.	Transv.
235	225	350-480	350-480	25	23		

Sources: EN 10253, DIN 17175, DIN 2528, DIN 1629, Stahlschlüssel, ASTM