

Fiche de donnees


Description

Reduction concentrique, DIN2616/
EN10253-2-B, P355NH,
cert. EN10204/3.1

Donnee principale

48.30 x 4.00 / 33.70 x 4.00 mm

D	48.30 mm
S1	4.00 mm
d	33.70 mm
S2	4.00 mm
L	64.00 mm

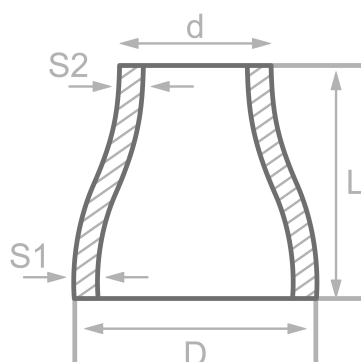

Composition chimique (analyse de lot) en % de la masse

(Limite superieure si une seule valeur est specifiee)

Nom court: P355NH

Numero: 1.0565

C	Si	Mn	P	S	Cr	Cu	Mo	Nb	Ni	Ti	V	Autres
0.18	0.50	1.70	0.025	0.010	0.30	0.30	0.08	0.05	0.50	0.03	0.10	Al. N

Proprietes mecaniques

Nom court: P355NH

Numero: 1.0565

Limite d'elasticite superieure ou lim. d'elast. reH ou Rp0,2 min pour epaisseurs T en mm, N/mm2 a temperature ambiante		Resist. a la traction Rm pour des ep. T en mm, N/mm2 a temperature ambiante		Allongement A a temp. ambiante, min. %		Travaux a impact minimum KV en J	
T ≤ 16	16 < T ≤ 60	T ≤ 16	16 < T ≤ 60	Longit.	Transv.	Longit.	Transv.
355	345	490-650	490-630	22	20	55	39

Sources: EN 10253, DIN 17175, DIN 2528, DIN 1629, Stahlschlüssel, ASTM